

RS
Rack Series

SiC
Technology


EL AC/DC SiC-RS

4 Quadrant Regenerative AC Electronic Load
Regenerative DC Bidirectional Source and Sink

Meticulously designed for R&D, validation,
and End-of-Line testing




Electromobility



Smart Grids



Photovoltaic



Academic &
Industrial Test



Power HiL



Energy Storage
System

EL AC/DC SiC-RS

4 Quadrant Regenerative AC Electronic Load Regenerative DC Bidirectional Source and Sink


This cutting-edge, high-efficiency converter is crafted specifically for R&D, validation, and EoL testing across various advanced fields, including electromobility, EV charging infrastructure, V2G, smart grids, distributed energy resources, Power HiL, battery inverters, energy storage systems, and aerospace.

The EL AC/DC SiC-RS is the only AC and DC Load you will ever need. It redefines performance, reliability, and quality. With state-of-the-art SiC technology, it achieves lower switching losses and a reduced footprint, perfect for applications demanding both space and efficiency



Regenerative Technology

Like all CINERGIA products, the EL AC/DC SiC-RS allows for the reinjection of used power back to the grid, resulting in a reduction of both consumed energy and required power contributing to a smaller carbon footprint.

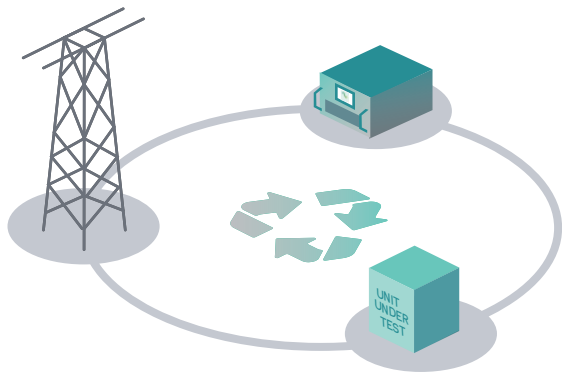

The Highest Efficiency

Our Rack Series offers the highest efficiency on the market for both sourcing and regenerating energy, resulting in greater energy savings and a reduction in electrical installation rating.



Functionalities

The EL AC/DC SiC-RS may be used as an AC Electronic Load, DC Bidirectional source/sink, Power Amplifier, Battery Tester, Cycler and Emulator, or PV Panel Emulator.



Made in Europe

SiC-RS family products are fully designed and manufactured in Europe, subject to the most rigorous testing, complying with CE marking, safety, EMC and ISO 9001 quality standards.

SiC Technology


High performance and efficiency

User Friendly Interface

Designed by engineers for engineers

Larger Touchscreen

7-inch display for easy local operation

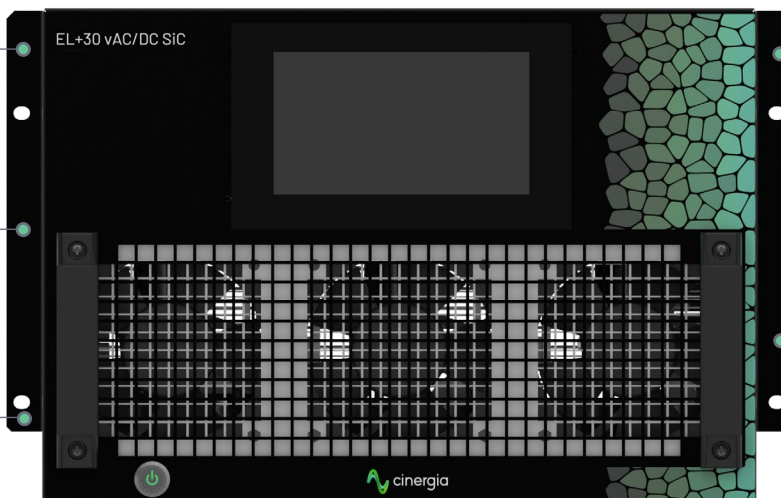

19-inch Rack format

With 30 kW in a 7U and a 715 mm depth unit, it can be easily mounted into standard 19-inch rack cabinets

Easy Integration

Analog & digital IO and the open MODBUS/TCP protocol are provided for seamless integration into automated test lines

Main features

19-inch rack format

30 kW in a 7U and 675mm depth unit, designed for 19-inch rack cabinets

The cumulative expertise of CINERGIA has been condensed into this compact unit that simultaneously excels in robustness, efficiency and cutting-edge technology for optimal performance.

The compatibility of the Rack Series with universal rack cabinets sets a new standard for space efficiency, modularity, and scalability, resulting in high versatility and easy integration into a comprehensive testing environment.

Easy Integration

Analog & digital IO and the open MODBUS/TCP protocol are provided for seamless integration into automated test lines.




*Rack / cabinet not included


Larger Touchscreen

Enjoy seamless functionality directly at your fingertips


Local control of the unit is easier than ever with the new 7-inch display, the bigger and brighter of its kind:



The LCD provides access to all functionalities of the unit without the need of a computer or ethernet connection: start/stop/reset, channel configuration, running test sequences, plotting and datalogging.

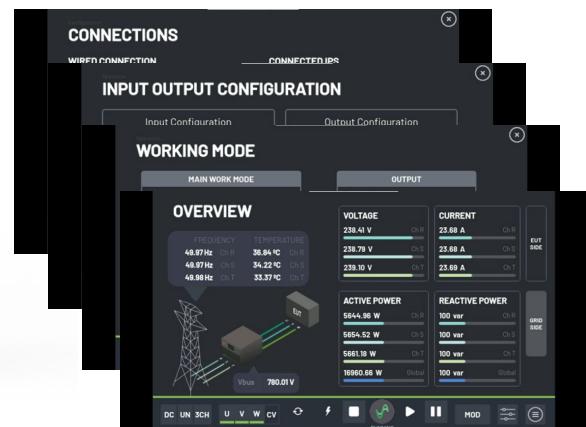


SiC Technology

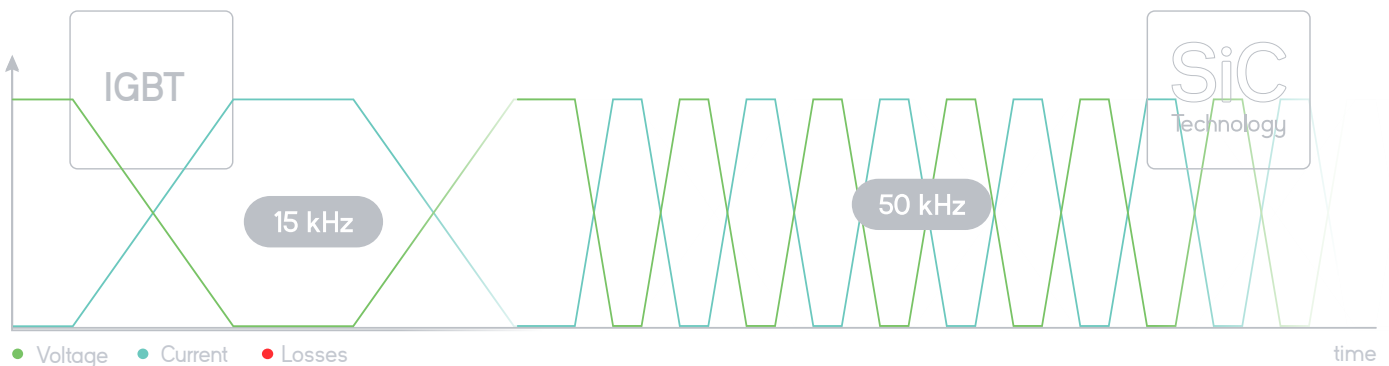

Transitioning to SiC technology results in an increased switching frequency of the converter, which translates into higher dynamics, faster transients and enhanced performance, making it the perfect candidate for EoL environments, R+D, Validation and Power Hardware in The Loop (PHIL) testing.

The faster switching time of the SiC MOSFETS reduces the current-voltage crossover duration, and therefore the losses at each commutation, improving overall efficiency.

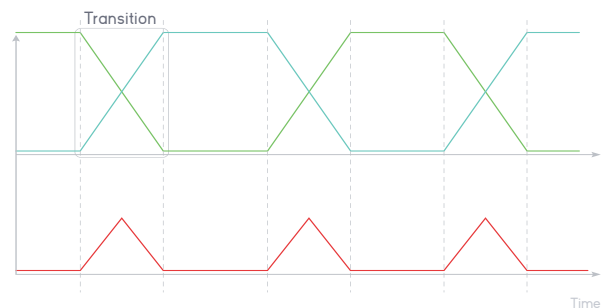


High Efficiency

Our Rack Series offers the highest efficiency on the market for both sourcing and regenerating energy, resulting in greater energy savings and a reduction in electrical installation rating.


- **Cost Savings:** Significantly lower electricity bills thanks to minimal energy losses.
- **Heat Dissipation:** Less excess heat generation simplifies thermal management.
- **Environmental Impact:** Reduced carbon footprint due to minimized energy waste and power reinjection.
- **Optimized Facilities:** Lower current drawn reduces wire size requirements and CAPEX needs.
- **Regenerative Technology:** The EL AC/DC SiC-RS reinjects energy back to the grid, cutting down on overall consumption and power needs.




Source

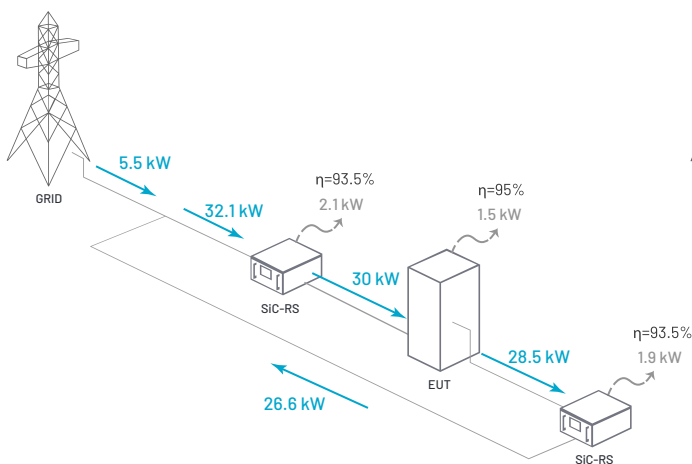

Regeneration

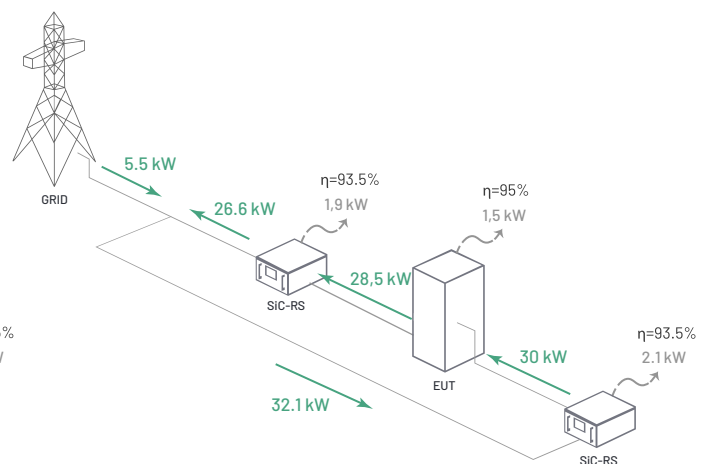

Bidirectional and Regenerative Hardware

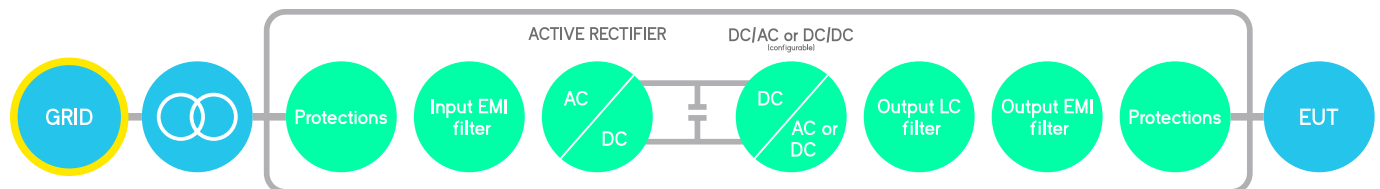


The hardware platform is built on a Back-to-Back power conversion topology, based on SiC MOSFETs transistors. The grid side stage is an Active Rectifier which produces clean sinusoidal currents with very low harmonic distortion and power factor close to one.

The EUT side output can be configured for AC voltage source or DC output. In AC, voltage or current is controlled by using state of the art digital Proportional Resonant controllers. In DC, the three independent buck-boost bidirectional legs enable the separated control of three DC voltages or currents.

Applications


Electromobility

EVSE and OBC

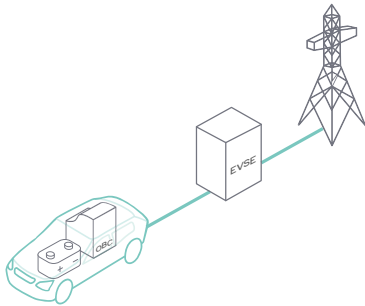


Electric Vehicle Supply Equipment is designed to charge the battery of EV in AC or DC. In AC applications the On Board Charger converts AC in DC.

Vehicle to grid (V2G)




V2G is a system where EVs interact with the power grid, allowing bidirectional energy transfer between them to balance demand and supply

Vehicle to Everything (V2X)

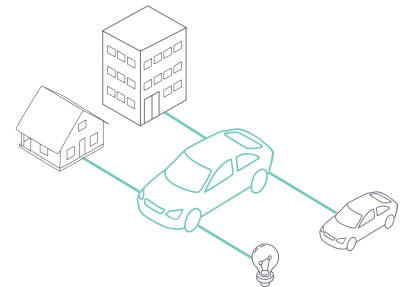

The integration of EV to the grid creates new applications as vehicle to home/building, vehicle to load, vehicle to vehicle, etc... included in V2X


EVSE MODE 2 TEST PLATFORM FOR TYPE 2 CHARGING CABLES

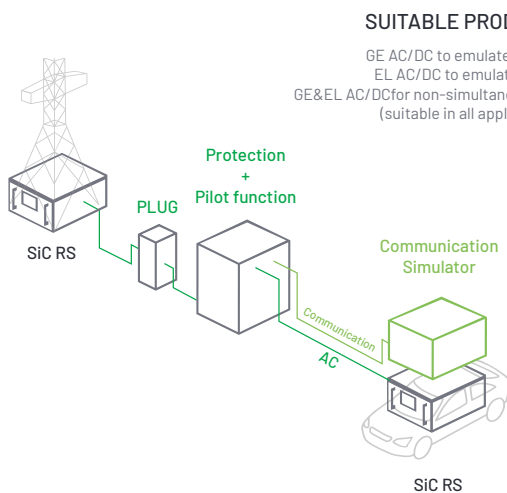

SUITABLE PRODUCTS

GE AC/DC to emulate the grid
EL AC/DC to emulate the EV
GE&EL AC/DC for non-simultaneous use (suitable in all applications)


EVSE MODE 3 TEST PLATFORM FOR WALL CHARGERS

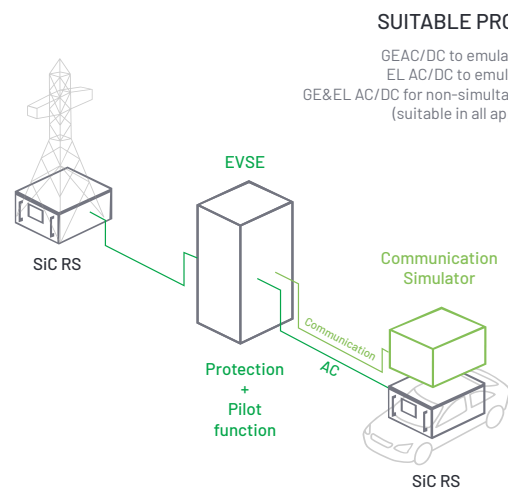

SUITABLE PRODUCTS

GE AC/DC to emulate the grid
EL AC/DC to emulate the EV
GE&EL AC/DC for non-simultaneous use (suitable in all applications)


EVSE MODE 4 TEST PLATFORM FOR DC CHARGERS

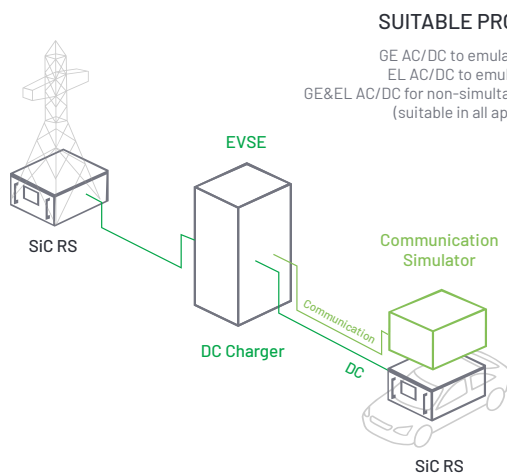

SUITABLE PRODUCTS

GE AC/DC to emulate the grid
EL AC/DC to emulate the EV
GE&EL AC/DC for non-simultaneous use (suitable in all applications)

MULTISTANDARD EVSE

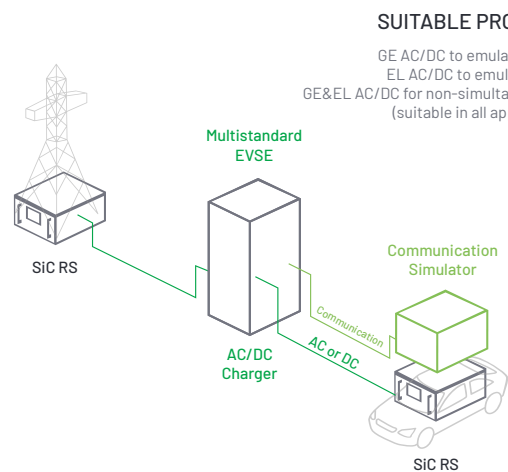

SUITABLE PRODUCTS

GE AC/DC to emulate the grid
EL AC/DC to emulate the EV
GE&EL AC/DC for non-simultaneous use (suitable in all applications)

User Interface



Designed by Engineers for Engineers

CINEINA is the software user interface supplied with every CINERGIA device, fully developed by our R&D team to provide full control over the unit.

Its intuitive and user-friendly design allows to effortlessly use the device's multiple functionalities, ensuring a minimal learning curve for both new and experienced users.




Features



Supervision

The Supervision tab offers comprehensive oversight of the unit's operation. All data is logged and graphed to monitor performance and ensure optimal functionality.


The Supervision window can be undock into a different screen for better overall control.



Plots

Record and track the unit's operation during testing with the Plots tab. This function is embedded in the unit and does not require any external devices or an internet connection.

All activity data is saved in convenient .csv files, ready for immediate plotting or download for later in-depth analysis.




Setpoint Control

When acting as an AC Load the setpoints can be independently given in Current Mode, Power Mode and Impedance Mode.

Power Mode allows choosing Active and/or Reactive Power.

Impedance Mode defines how resistive, capacitive and/or inductive the load will be.

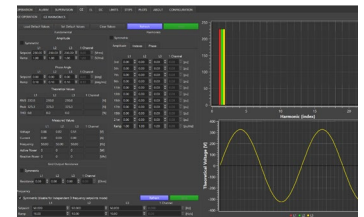


AC



AC Operation

Each phase can be independently configured: RMS current, frequency, phase delay, harmonics distortion, as well as the ramps associated with each mentioned variable. The expected waveform is plotted, the FFT is represented and the numeric data shown: RMS, peak, CF and THD.



Harmonics


The CINEINA software allows the generation of sub-harmonics, interharmonics and high frequency harmonics up to the 50th, setting both magnitude and phase delay. Harmonic sequences can be saved and loaded as .csv files to ease testing standardization.



Non-Linear Load

Non-linear loads can be defined and tested in the EUT side while clean current is reinjected back to the grid.

Thanks to the Active Boost Rectifier current on the grid side is ensured to have >3% THDi regardless of the EUT.

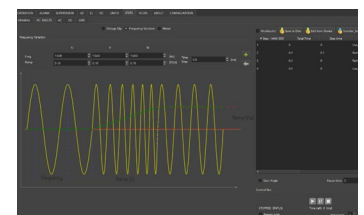


DC



DC Operation


The DC Unipolar/Bipolar panel is where the setpoints and limits are defined. Each of the 3 channels can work simultaneously in a different Operation Mode: Voltage, Current, Power, Resistance, Battery Test, Emulation, PV Emulation... Transition ramps, voltage and current limits can be adjusted individually to ensure safe testing, particularly in battery applications.



Sequence


CINEINA includes a Test Editor with the purpose of designing and/or importing automated sequence tests, which can later be exported as .csv files.

A smart datalogger can be set to automatically save voltage, current and power measurements with a 400ms time resolution.



Multichannel

Enabling the Separated Channel Control converts the device in three functionally independent DC Bidirectional Power Supplies, sharing the common negative rail. Each channel can have a different status (ON, OFF, Warning, Alarm), Operation Mode (see Range and Specifications table), Setpoint, Ramp and Limits.

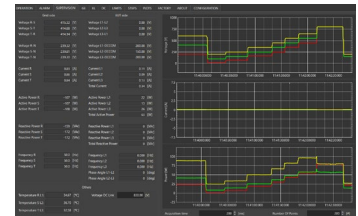

Battery Pack Tester


An integrated software designed for testing charge/discharge battery cycles. Thanks to the Multichannel, 3 batteries or battery packs can be tested simultaneously. Test parameters such as charge/discharge current, float, boost voltage, number of cycles... can be adjusted for monthslong tests.



Battery Emulation


The unit incorporates a mathematical model in order to emulate the behaviour of real batteries or battery packs. Defining the characteristic parameters enables the simulation of different battery technologies (Lilon, NiMH, NiCd, Pb...).

All within one unit!



PV Panel Emulation

Based on a single-diode equivalent circuit, the PV Emulation mode allows the virtual simulation of solar arrays. The PV Panel characteristic parameters, string configuration, irradiance and temperature values can be defined or exported from a .csv file for flexible testing.

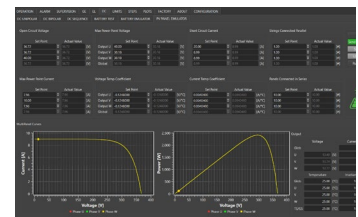

Range & Specifications

Input side (GRID side)

AC Voltage

Rated: 3x400 Vrms +Neutral+ Earth (5 wires)
Optional 3x480 Vrms (4 or 5 wires)*

Rated AC Current

< 48 A/phase (@rated conditions)

Frequency

47-63 Hz

Current Harmonic Distortion

THDi <2% at rated power

Power Factor

PF>0.98 at rated power

Efficiency

>93,5% (@rated conditions)

*This option will add the IT-RS transformer.

Output side in EL-AC

Admissible Voltage

Connection: 1-phase, 3-phase star or 3-phase delta
Maximum: $\pm 400\text{V}$ peak (420V with HV option)
Range: 10-400Hz
35 to 277Vrms phase-neutral (295Vrms with HV option)
35 to 480Vrms phase-phase (510Vrms with HV option)
Maximum rms voltage follows $V \cdot f < 180000$

Current Mode (CC)

Range: from 0 to $\pm 130\%$ ⁽⁸⁾ of I_{rated}
Setpoint Resolution: 10mA_{rms}
Effective Resolution⁽²⁾: < 0.05% of FS⁽³⁾
Setpoint Accuracy⁽⁴⁾: < $\pm 0.2\%$ of FS⁽³⁾
Transient Time⁽⁵⁾: [$< 100 \mu\text{s}$ (10% at 90%)]
Slew Rate: 1 A/ μs

Phase Angle (cos ϕ)

Range: -90 to 90° in Sink / Source
Resolution: 0.01°

Harmonics

Range: up to 5kHz (up to 50th harmonic)
50 independent harmonics per phase:
21 free programmable frequency and phase from 0.1 to 50 times f_0
29 fixed frequency

Power Mode (CP / CS)

Range: from 0 to $\pm 130\%$ ⁽⁸⁾
The current setpoint is derived from ISI and <S
Setpoint Resolution: 1W, 1VA
Effective Resolution⁽²⁾: < 0.1% of FS⁽³⁾
Setpoint Accuracy⁽⁴⁾: $\pm 0.4\%$ of FS⁽³⁾
Transient Time⁽⁵⁾: [$< 100 \mu\text{s}$ (10% at 90%)]

Impedance Mode (CZ)

Calculation method configurable (rms, instantaneous)
Range: from 0.8 to 1000 Ohm, 0.1 to 2000mH, 0 to 3.7mF
Current setpoint derived from $|Z|$ and $\angle Z$
Setpoint Resolution: 0.01 Ohm/mH/mF
Setpoint Accuracy⁽⁴⁾: see current accuracy
Transient Time⁽⁵⁾: [$< 100 \mu\text{s}$ (10% at 90%)]

Output side in DC (EUT side)

Terminals

Number: 6 (3 positive + 3 negative)

Configuration of Channels

Unipolar:

3 Channels: 2 Quadrants, independent setpoints per channel

1 Channel: 2 Quadrants, single setpoint

Bipolar: 4 Quadrants, two independent setpoints

Multichannel: 2Q, independent start/stop/reset, operation mode and setpoints per channel

Voltage Mode (CV)

Range: 2 Quadrants: 0⁽¹⁾ to 800 V (Unipolar configuration)

4 Quadrants: $\pm 380 \text{ V}$ to $\pm 380 \text{ V}$ (+ rail / 0 / - rail, Bipolar configuration)

Setpoint Resolution: 10 mV

Effective Resolution⁽²⁾: $< 0.05\%$ of FS⁽³⁾

Setpoint Accuracy⁽⁴⁾: $\pm 0.1\%$ of FS⁽³⁾

Transient Time⁽⁵⁾: $< 250 \mu\text{s}$ (10% to 90% of Vrated)

Ripple⁽⁷⁾: $< 2 \text{ Vpp}$ (with probe bandwidth $< 250 \text{ kHz}$)

Current Mode (CC)

Range: from 0 to $\pm 110\%$ of Irated

Setpoint Resolution: 10 mA

Effective Resolution⁽²⁾: $< 0.05\%$ of FS⁽³⁾

Setpoint Accuracy⁽⁴⁾: $\pm 0.2\%$ of FS⁽³⁾

Power Mode (CP)

Range: from 0 to $\pm 110\%$ ⁽⁸⁾ of Prated

Derived current setpoint: Psetpoint / Vmeasured

Setpoint Resolution: 1 W

Effective Resolution⁽²⁾: $< 0.1\%$ of FS⁽³⁾

Setpoint Accuracy⁽⁴⁾: $\pm 0.4\%$ of FS⁽³⁾

Resistance Mode (CR)

Range: from 0.1 to 1000 Ohm

Derived current: Vmeasured / Rsetpoint

Setpoint Resolution: 0.01 Ohm

Setpoint Accuracy⁽⁴⁾: $\pm 0.2\%$ of FS⁽³⁾

Overload/ Overcurrent

Admissible AC overcurrent and overload:

115% of rated value during 10 minutes,

120% during 1 minute, 130% during 2 seconds

Admissible DC overcurrent and overload:

110% during 1 minute

Operation Modes

AC

Programmable Constant Voltage (CV) (only in GE+)
Steps
Programmable Current (CC)(only in EL+)
Programmable Power (CP / CS)(only in EL+)
Programmable Impedance (CZ)(only in EL+)


DC

Programmable Constant Voltage (CV)
Programmable Constant Current (CC)
Programmable Constant Power (CP)
Programmable Constant Resistance (CR)
Steps
Optional Battery Testing (BTest)(charge/discharge/cycling)
Optional Battery Emulation (Bemu)
Optional PV Panel Emulation (PVEmu)

Power Hardware In the Loop

Power Amplifier (PHIL)


AC or DC Power Amplifier
Delay Analog Input to Real Power Output: 150 μ s
Delay Real Power Output to Analog Output Signal: 130 μ s
* Delay time calculated working in AC configuration.

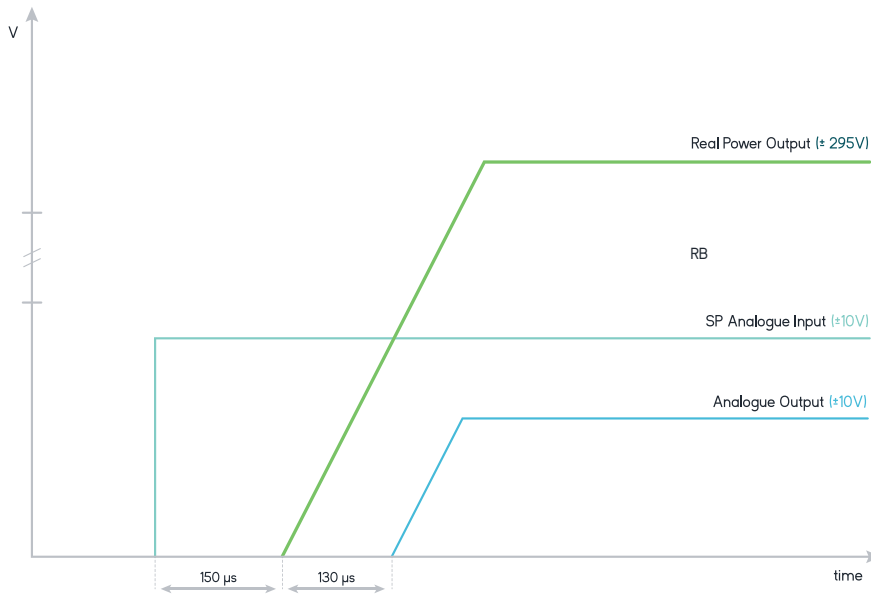

User Interface

Local Control

- 7" Touchscreen panel
- Isolated Digital I/O (DB15):
6 inputs, 4 outputs
- Isolated Analog I/O (BNC):
6 inputs (rms setpoints or power amplifier),
6 outputs (rms readback or real-time readback)
- Emergency Stop port: 1 NC Input

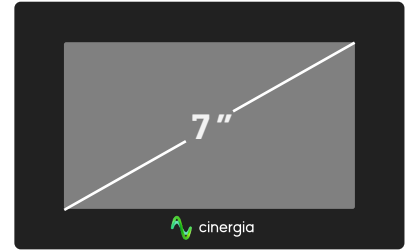

Remote Control Port

- LAN Ethernet with Open Modbus-TCP protocol

Software

- Graphical User Interface for Windows 7/10/11
- LabView drivers and open Labview interface example

Master/Slave Operation

- Connection: fiber optics link (x6)
- Configuration: from software user interface/MODBUS up to 8 units:
AC: Parallel
DC: Parallel, serial or serial-parallel

Size and Weight

Height

- 7U (310 mm)
12,20"

Width


- 440 mm
17,30"

Depth


- 715 mm
28,14"

Weight

- 50 kg
110.23 lbs

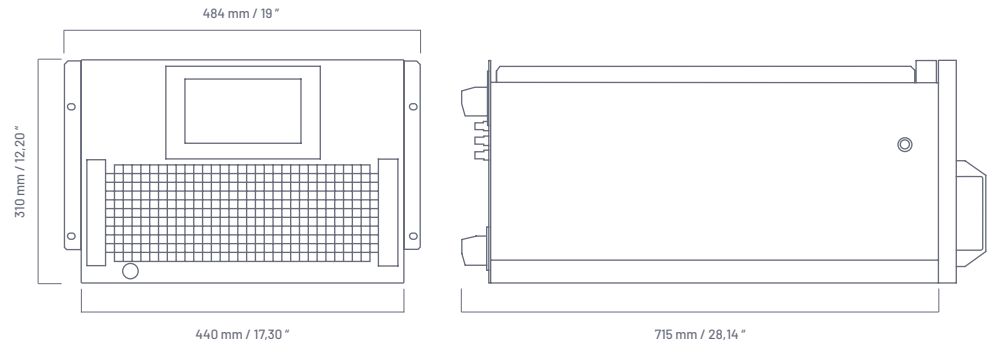

Connections

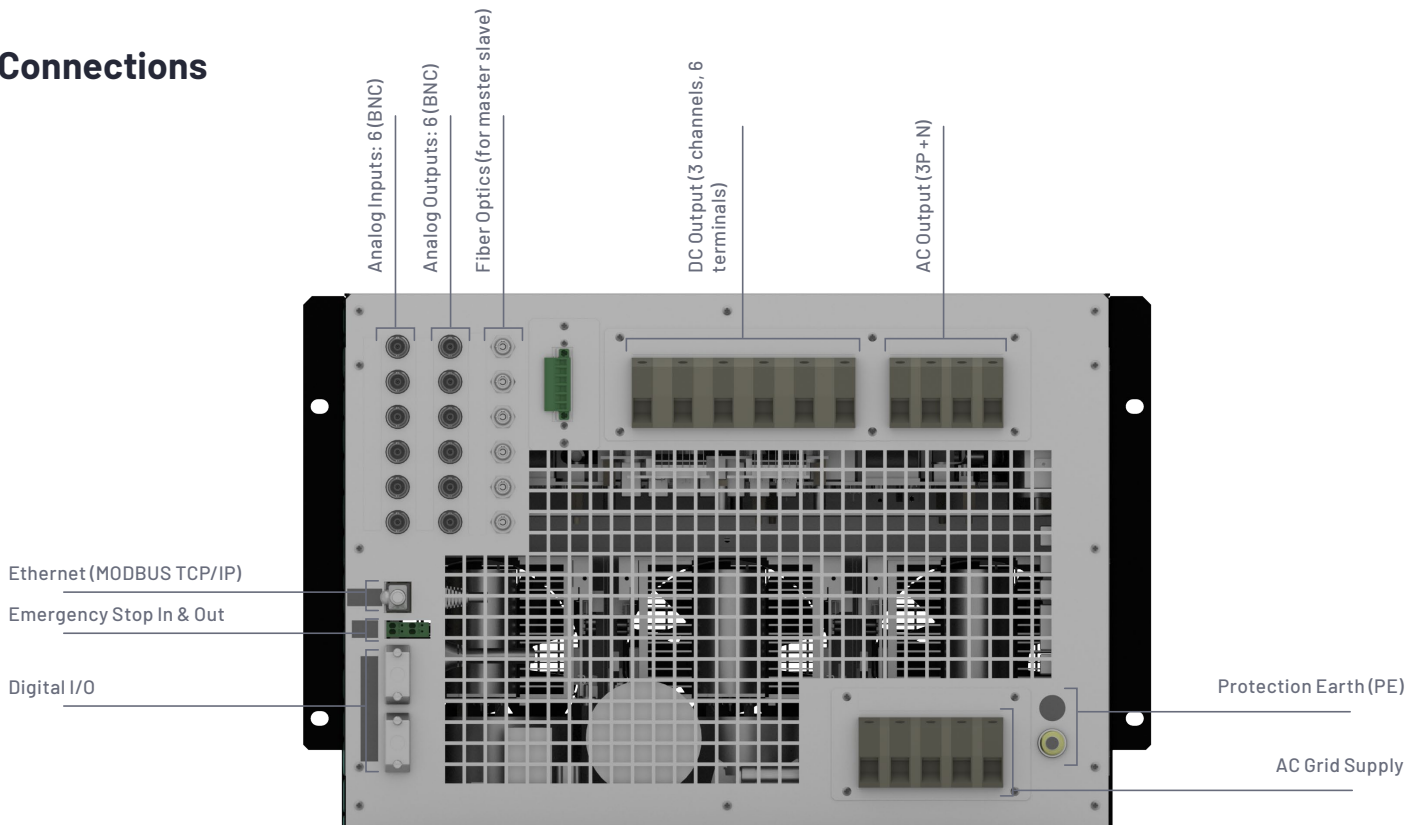

Protections

Overvoltage (peak, rms), Overcurrent (peak, rms), Overload, Shortcircuit, Emergency Stop, Watchdog, Heart Beat, Output Contactor, Wrong Configuration
Alarms and Limits are user configurable and can be saved in a password protected EEPROM

Mesurements ⁽⁶⁾

GRID: Voltage (rms), Current (rms), Active and Reactive Power (P,Q) and Frequency
EUT: Voltage (rms), Current (rms), Active and Reactive Power (P,Q), Frequency and Phase Angle
Heatsink Temperatures and DC Link Voltage
Datalogging available through FTP connection

Ambient

Operating temperature⁽⁶⁾: 5-40°C
Relative Humidity: up to 95%, non-condensing
Cooling: Forced air
Acoustic noise at 1m: <55 dB

Standards

CE Marking
Operation and Safety: IEC 61010-1
EMC: EN-61326-1
RoHS, REACH

All specifications are subject to change without notice.

All specifications are subject to change without notice.

1. Working at low voltages is possible but ripple requirements must be checked, specially in DC
2. Effective resolution measured with a 400 ms window
3. FS is defined by the range of the unit, including overcurrent and overload when applicable
4. Accuracies are valid for settings above 10% of FS
5. Measured with the rated resistive load and high-dynamics controllers configuration. Adjustment of controllers may be necessary to reduce oscillations in some applications, e.g high capacitance
6. Accuracy of measurements is $\pm 0.1\%$ of FS for rms voltage, $\pm 0.2\%$ of FS for rms current, $\pm 0.4\%$ of FS for active power (valid only above 10% of FS)
7. Measured at 400 V under resistive load
8. Rated power figures are given at 25 °C, power derating applies at higher temperature
9. The maximum output voltage depends on frequency following $V \cdot f < 180000$ V·Hz

EL AC/DC SiC-RS

Reference	AC Power 3phase* Rated	AC Current Rated RMS Per channel	DC Power Rated	DC Current Rated Per channel	Weight (kg) (lbs)	Dimensions DxWxH (mm) (inch)
EL 22.5 AC/DC SiC-RS	22.5 kVA/kW	44 Arms	22.5 kW	±44A	50 kg 110.23 lbs	715 x 440 x 310 mm (7U) 28.14 x 17.32 x 12.20 "
EL 30 AC/DC SiC-RS	30 kVA/kW	44 Arms	30 kW	±44A	50 kg 110.23 lbs	715 x 440 x 310 mm (7U) 28.14 x 17.32 x 12.20 "

(*) Consult us for derating in AC 1 Channel mode, derating applies

Isolation Transformer RS

Reference	AC Power 3phase Rated	Weight (kg) (lbs)	Dimensions DxWxH (mm) (inch)
IT30-RS**	34 kVA/kW	180 kg 396.83 lbs	710 x 440 x 210mm (5U) 27.95 x 17.32 x 8.28 "

(**) Transformers with Star-Star (Y-Y) or Delta-Star (Δ-Y) configuration are available.

All specifications are subject to change without notice.

Channel Configuration in EL

3 Channels
 1 Channel

Channel Configuration in DC

3 Channels
 1 Channel

Unipolar
 Unipolar

Bipolar

Configuration Modes

EL AC
 PHiL AC
 DC
 PHiL DC

Master / Slave

Parallel in AC mode

Parallel
 Serial
 Serial Parallel in DC mode

Talk directly with our engineers.

✉ sales@ciner giapower.com
 ☎ +34 934 864 358
 🌐 www.ciner giapower.com

Can Baletes 7, Nau A
 08310 Argentona
 Barcelona (Spain)
 Follow us on:
 Youtube, LinkedIn, Twitter

Scan the QR code to view the complete datasheet



Regenerative Power Electronic Solutions